



# Glaslide™

## Frameless Outdoor Sliding Glass Panel System

Outdoor spaces are increasingly being designed for greater flexibility - for a variety of uses and year-round living. The introduction of Frameless Sliding Glass Panels into an outdoor area creates a unique outdoor space, with the functionality of indoor spaces.

**Frameless** Outdoor Sliding Glass Panels provide a light and airy, semi-protected area which allows you to keep entertaining and enjoying the outdoors.

**Glaslide™** Glass Sliding Doors are designed and manufactured in NZ for Kiwi lifestyles, offering additional weather protection for outdoor spaces, especially those with opening louvre roofs. Easy to operate, Glaslide™ doors slide seamlessly on their low bottom tracks and automatically lock into place as they slide past each other. Designed within the NZ wind parameters, Glaslide™ doors are suited to a wide range of outdoor sites throughout NZ, helping you to achieve your dream outdoor living space.

*Custom made for your home*





### Features

- Double and triple track options
- Two, three, four and six panel configurations
- Low bottom track, just 22mm
- Opening of Glazing Space up to 80%
- Foot operated interconnecting locking system
- Maximum Panel weight 120 kgs
- High Quality Tandem Nylon and Stainless Steel Rollers
- Frameless glass panels in 10mm, 12mm and 15mm thicknesses, in accordance with NZS4223.3.206
- Extrusions powder coated in a wide range of Dulux Colours


### Maximum Dimensions

#### Glaslide Panel Sizes - Toughened Glass

In accordance with NZS 4223.3.2016

- Toughened Glass Max Panel Height is 3000mm
- Toughened Glass Max Panel width is 1100mm, up to max 2800 high
- Toughened Glass Max Panel width is 1000mm up to max 3000mm high

### System Sections

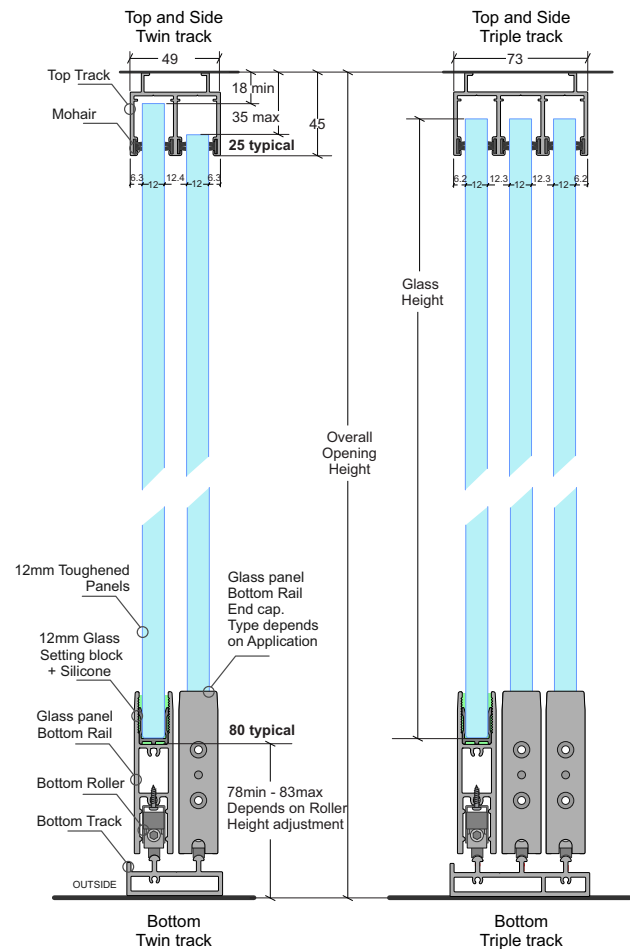

Panels available in 10mm, 12mm (shown) or 15mm Toughened Glass. For more information re multiple doors setouts refer to the product manual.

### MAX PANEL HEIGHT (not exceeding mm)

### GLASS TYPE MINIMUM Thickness (mm)

	Wind Zone (ULS)			
	Low 0.72kpa	Medium 0.96kpa	High 1.36kpa	Very High 1.76kpa
2000	10mm	10mm	12mm	12mm
2400	12mm	12mm	15mm	15mm
2800	12mm	15mm	15mm	N/A
3000	15mm	15mm	N/A	N/A

**masterspec partner**

SECTION 4522JB

[WWW.HOMEPLUS.CO.NZ](http://WWW.HOMEPLUS.CO.NZ)

The products in this brochure are the subject of intellectual property protection. All brands are either trademarks of Juralco Aluminium Building Products Ltd or used under licence. Dulux® is a registered trademark of Dulux Group (Australia) PTY LTD.

H/BR/GLASLIDE/20

